

Virtual Balise and Digital Map: RFI's perspective

Rail Session

M. Ciaffi – Head of ERTMS on-board subsystems - RFI



UE23 PRESIDENCIA ESPAÑOLA CONSEDO DE LA UNIÓN EUROPEA

ERSAT (ERtms + SATellite)

GNSS as Game-Changer innovation for ERTMS

- RFI have been believing in the opportunities of the introduction of GNSS navigation technologies into ERTMS since 2012 (more than **10 years**), date of the launch of the ERSAT programme.
- The primary objective was to test and validate the integration of GNSS navigation technology in railway, by leveraging
 "virtualization" of balises without altering the ERTMS architecture.

The **GNSS navigation** technology has been successfully tested on tracks in Sardinia on the **Cagliari-S. Gavino** line.


The validation and certification phase of the "virtual balise" functionality using GNSS on the Novara-Rho pilot line (where ERTMS is already activated with physical balises) has been recently commissioned.




IN FOCUS Italy

Ersat moves into the roll-out phase

Having amassed nearly 10 years of cumulative experience of satellite technologies for use with ERTMS, including virtual balises and radio frequency interference, RFI has gained sufficient confidence to start work on its first operational application.

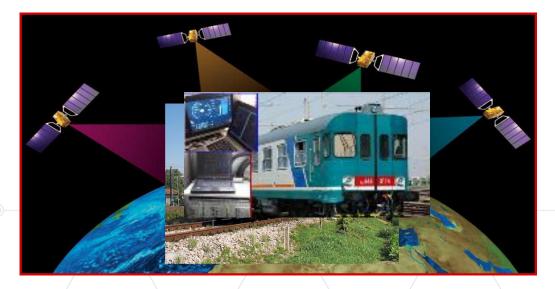

#EUSpace

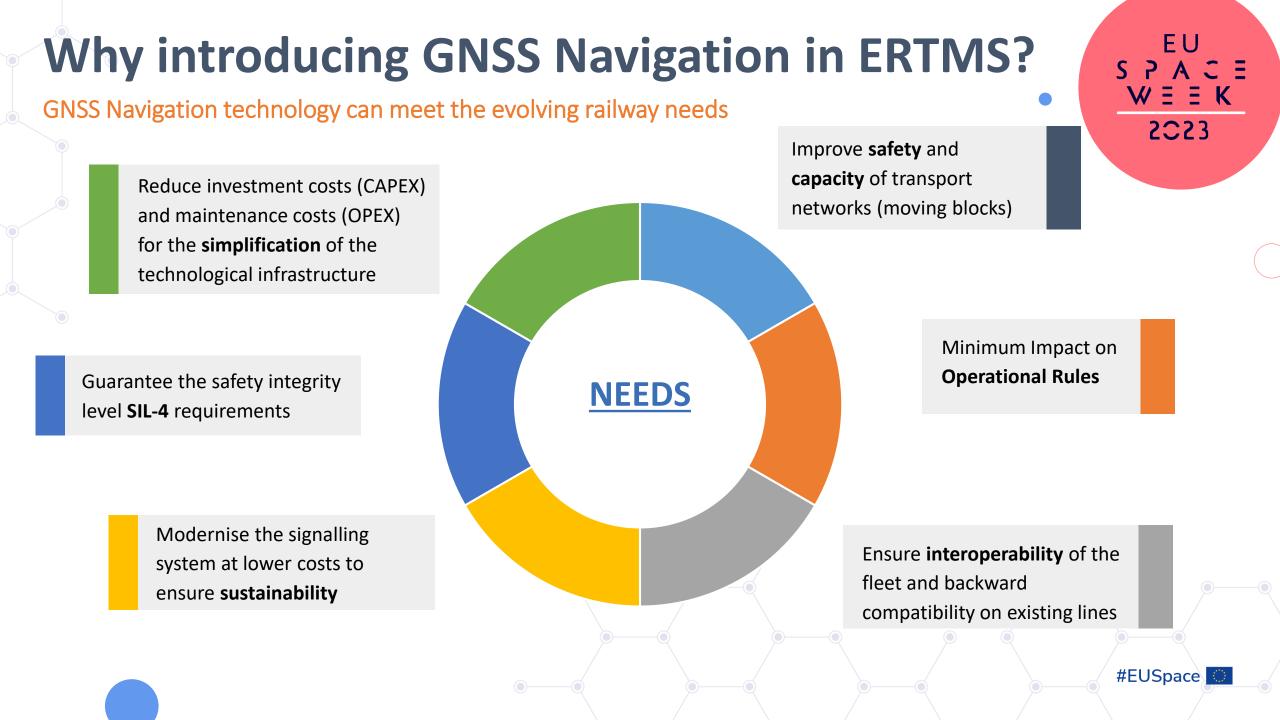

Advantages of using GNSS in ETCS

RFI expectations

Overcome some of the weak points of current ETCS odometry having an undesirable impact on operation (e.g., dealing with slip/slide phenomena) Allow TRK asset reduction by using virtual reference points (provided a standard Digital Map is available) instead of only physical balises Facilitate the reduction of TTDs above all for highcapacity applications (in combination with additional functions such as Train Integrity and Safe Train Length) Minimise the distance travelled in SR to SoM or after recovery from a fault, being able to always estimate the position of the train along the track Provide possible solutions to additional functions such as Train integrity and Cold Movement Detector

EU

₩ Ξ Ξ K

2023


#EUSpace



Slip/slide phenomena



Physical balise can be drastically reduced

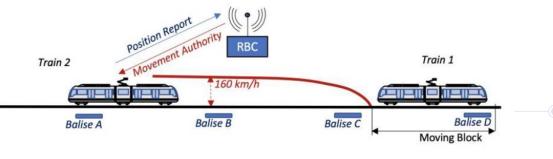


Moving blocks

Virtual Balise

Satellite-based localization translated into the legacy balise language

- A Virtual Balise is a virtual point on the track that can be detected by a train equipped with a GNSS receiver and an antenna.
- The Virtual Balise Reader (VBR) processes GNSS signals to evaluate a condition of "matching" between the estimated train position and the known VB Location; if a VB detection event occurs, the related Balise Information is sent to ETCS Kernel as a Real BTM function would.
- The virtual balise functionality in ETCS can reduce the installation and maintenance costs (by replacing or complements the physical balise), increase the flexibility and scalability of the railway system, and improve the performance and safety of train control.

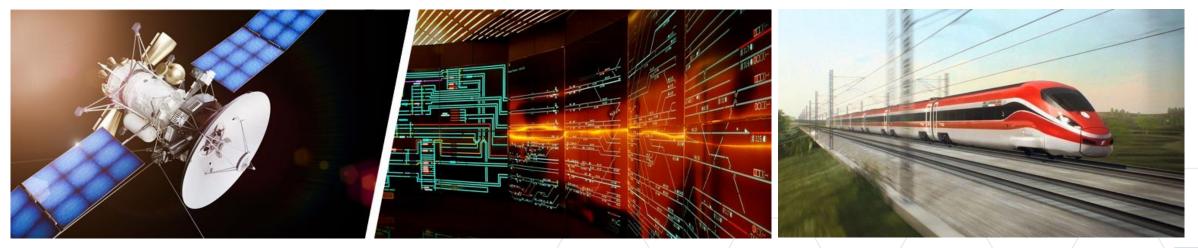

2023

Virtual Balise

CAPEX and OPEX reduction


EU SPACE WEEK 2023

The 'virtual balise' solution is able to improve the sustainability of the ERTMS signalling system over its entire lifetime (reduction of CAPEX and OPEX approx. 40 K€/Km), the regularity of the rail service (-30% failures) and increase capacity by 15% to 30%.

Application of a cost-benefit analysis to compare the cost-effectiveness of GNSS-based ERTMS versus traditional ERTMS at European level

(Source: Bocconi University)

Additional benefits with the Hybrid ERTMS L3 for which up to 16 balise/km are necessary

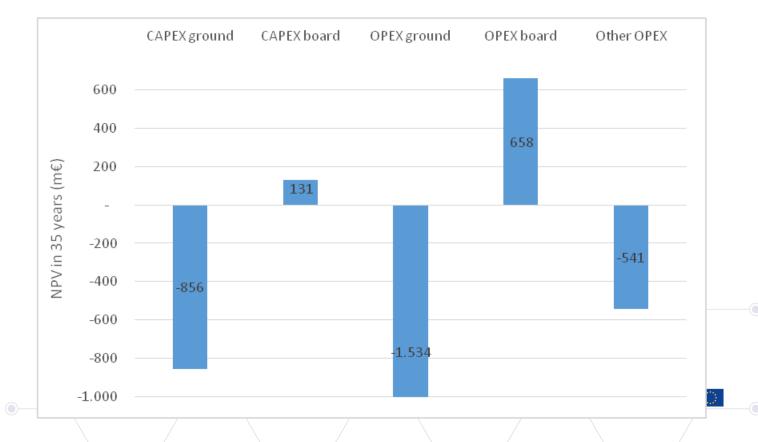

Experimenting GNSS on tracks

The Italian sites






Trail site of the ERSAT EAV project operating in Sardinia on the **Cagliari** -**San Gavino** line since February 2015



Pilot line **Novara - Rho** with ERTMS L2 and GPS + GALILEO satellite navigation systems.



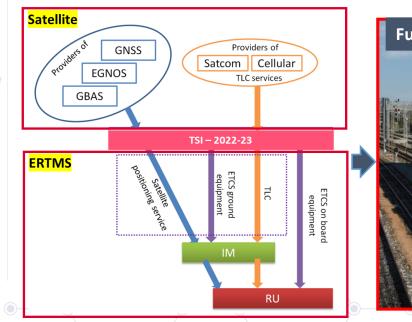




EU

5 7 A C E ₩ E E K

2023

ERSAT Trial Site Architecture

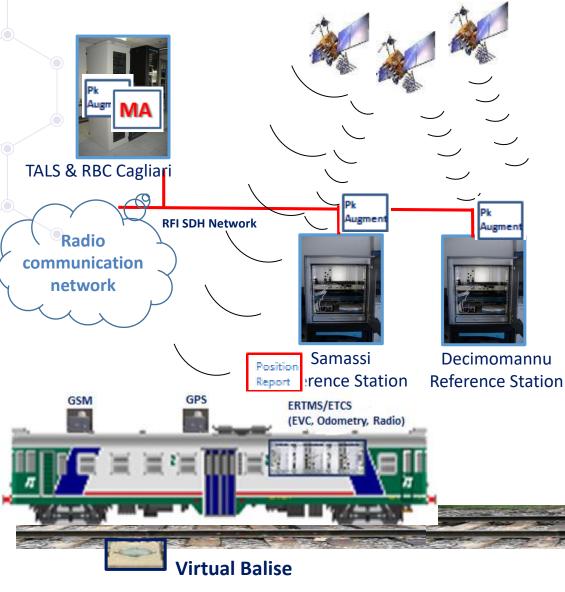



The concept of VB is useful to translate the satellite-based location determination into the legacy balise language. The detection of the VB is accomplished by mapping the augmented GNSS-based PVT to the Digital Map and comparing the current position on the map with the VB locations referenced in the map as well.

GNSS Constellation


(GPS + Galileo)

#EUSpace

Virtual balise + ERTMS L2

Experimenting the integration of the **ERTMS L2** system with a satellite solution derived from the ERSAT project.

Funded by RFI to validate and certify the GNSS in the frame of the ERTMS

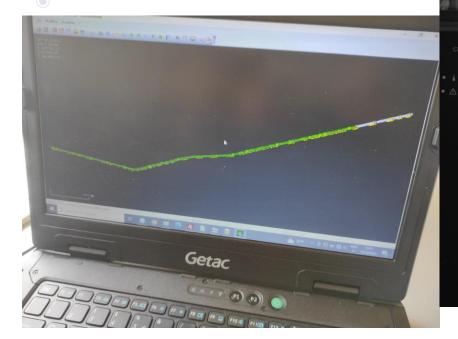




DMI




PVT solution on the entire track

On-board equipments

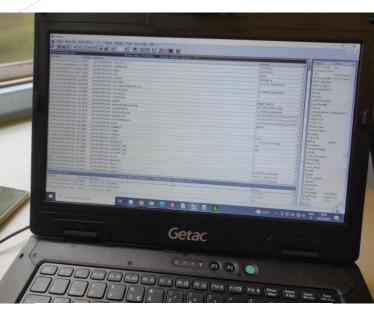


On-board Diagnostic Tools

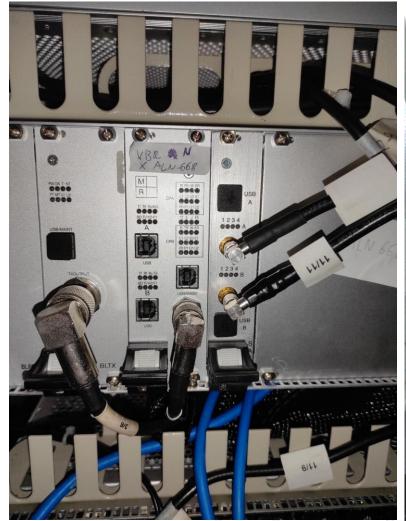

Virtual Balise Reader



• ASSESSMENT AND CERTIFICATION PLAN

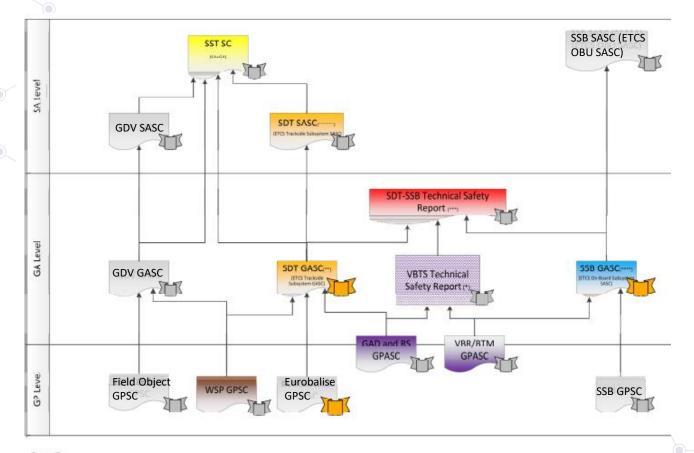

ISA report

T

report + EC conformity Certificate (NoBo) + EC Declaration of Conformity (ASTS)

Acronyms:

- SST: Trackside subsystem
- SDT: RBC + Eurobalises
- GDV: Interlocking
- SSB: On Board subsystem
- VBR: Virtual Balise Reader
- WSP: Wayside Standard Platform
- GNSS: Global Navigation Satellite System
- GAD: GNSS Augmentation Dissemination
- VBTS: Virtual Balise Transmission System
- RS: Reference Station
- EVC: European Vital Computer
- BTM: Balise Transmission Module


#EUSpace

EU SPACE WEEK 2023

ASSESSMENT AND CERTIFICATION PLAN


Aim of the assessment and certification activities is:

- As.Bo. Assessment. Goal of this item, both at RBC and ETCS on board level, is the demonstration of:
 - Safety Integrity level (SIL4) of the satellite hardware and software components with reference to the safety requirements identified during the risk analysis;
 - Safety Integrity level (SIL4) of the RBC and ETCS on board including the satellite technology parts;
 - Demonstration of the no intrusiveness of the satellite technology on the ERTMS hardware and software already in service on the Novara-Rho line;
- No.Bo. Certification: Demonstration of the certifiability of the interoperable components (RBC and ETCS on board) after the introduction of the satellite hardware and software technology

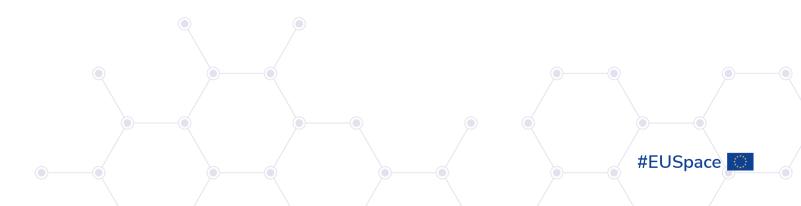



Projects supporting the ERSAT program

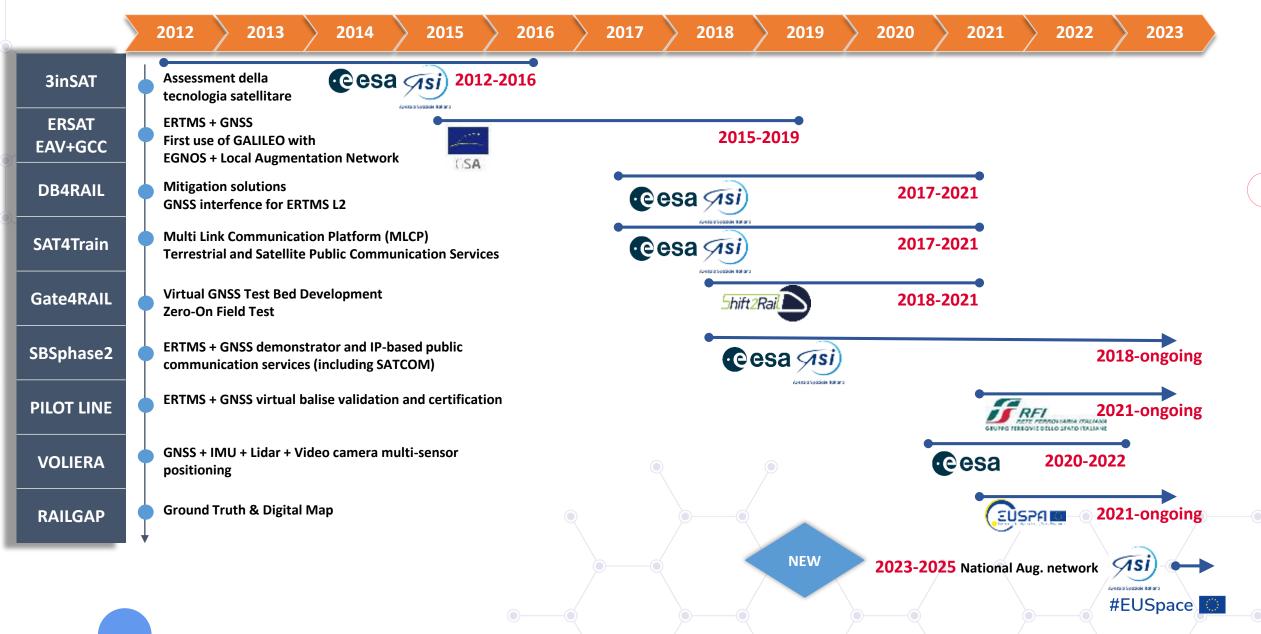



RAILGAP Project: Focusing on Digital Map

Rail Session

G. Emmanuele – RAILGAP Project Coordinator - RFI







RAILGAP

Main objectives



The project aims to address two gaps still hindering the adoption of satellite-based solutions in railway applications:


- the lack of high-quality and fidelity **Ground Truth** data, to be used for characterizing, evaluating and assessing any solutions with impact on the train position that will be chosen for safe applications
- the need for a modernized process for mapping existing railway tracks cost-effectively

Ground Truth and Digital Maps will be essential elements of EGNSS train positioning systems and V&V environment.

EU

WEEK

2023

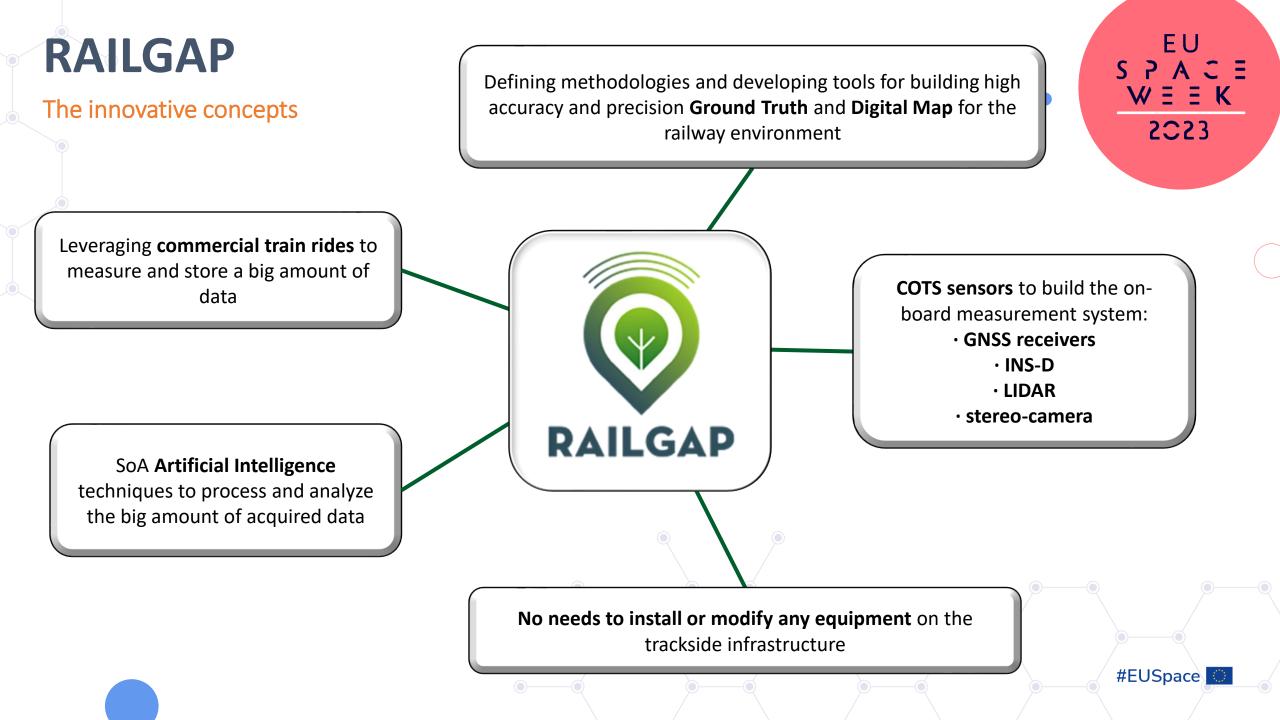

Digital Map

How has it been defined in RAILGAP?

EU S P A C E W E E K 2023

#EUSpace

- The Trackside Digital Map (TDM) tool has been designed for the needs of railway companies, operators and maintenance personnel, with the aim of providing an up-to-date and detailed georeferenced information of the track layouts, infrastructure, and signalling items, as selected in RAILGAP.
- The TDM could help to improve overall operational efficiency and reduce downtime. It can also be used to support maintenance activities, ensuring the efficient and reliable operation of the rail network.

DM is described in terms of the following information:

Тороlоду	The track network is described as a topological node-edge model.
Coordinates	Railway infrastructure elements can be located in an arbitrary 2- or 3-dimensional coordinate system, e.g. the WGS84 that is widely used by today's navigation software.
Geometry	The track geometry described in terms of radius and gradients.
Railway infrastructure elements	The railway assets selected in RAILGAP that can be found on, under, over or next to the railway track, e.g., balises

Digital Map

Track elements to be identified in the context of RAILGAP

Elements on the railway track

Switch indicator

Eurobalises

Other track elements

Tunnel

Bridge / Road overpass

Track


Elements in the track proximity

Light signals / ETCS marker

Track sign

Level crossing light signal

Pole of overhead power line

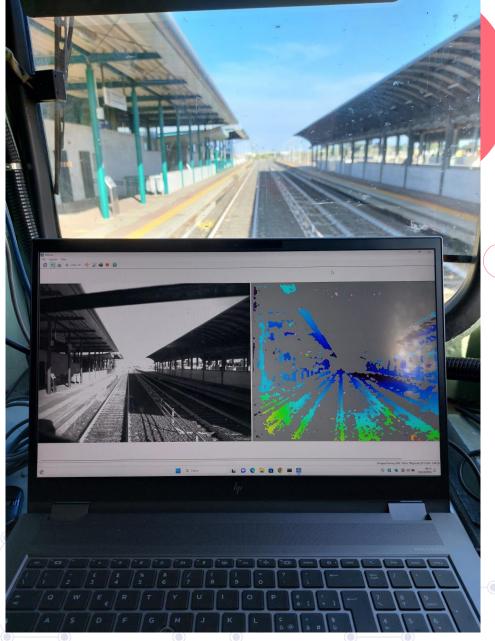

Stereo-camera data acquired during the RAILGAP field test campaign in Sardinia

#EUSpace

RAILGAP DM User Requirements

TDM toolset shall be able to **process time-synchronized data** coming from **different sensors** based on positioning (i.e., GNSS and IMU), imaging and ranging sensors (i.e., cameras and LIDAR) acquired through commercial trains equipped with the RAILGAP measurement subsystem.

TDM toolset shall be able to **detect, classify and georeference** signaling object components of the TDM, selected in RAILGAP.

TDM toolset shall be able to build the DM by using standard format and semiautomatic way.

TDM toolset shall be able to perform continuous **monitoring**, **control and automatic update** of the RAILGAP TDM when significant changes occur.

TDM toolset shall be able to **scale** the DM structure allowing aggregation of additional information layers and the connection of different sections of the railways network (national or European).

Positioning, imaging and ranging sensors' records shall contain **timestamps** to enable the offline ordering of the events.

To define the track layout, the process for building the Digital Map should be able to compute parameters such as **gradient**, **radius** or **CANT** by offline processing the recorded data.

RAILGAP DM User Requirements

DM topology shall be integrated in a format allowing the **integration of the different layers of information** such as railway standardized format (e.g. RailML), track topology, signaling elements and conditions (e.g. UNISIG Subset-112 or RailML) and/or universal description of railway business objects (e.g. UIC RailTopoModel or RailML).

The toolset for performing the continuous monitoring, control and update of the DM shall **detect anomalies** (critical deviations) w.r.t. the current version of the RAILGAP Digital Map.

The whole process of creating and updating the digital map could be carried out **automatically** by the toolset, with the involvement of a human operator only in the case of anomalies or discordant choice factors.

DM toll shall incorporate a monitor for detection of conditions that may impair a reliable map construction, such as **poor visibility or LIDAR range degradation**. Under such conditions the tool will discard runs or parts of them and will raise alerts.

More details can be found in the public deliverable "D2.1 USER REQUIREMENTS DOCUMENT RELATED TO DIGITAL MAP AND REFERENCE MEASUREMENT VALUES & PROCEDURES" available for download on the <u>RAILGAP official webpage</u>.

#EUSpace


WEEK

2023

RAILGAP DM construction scheme

A recursive approach

- LIDAR and camera data collected during a single ride are used to estimate the location of track signalling elements in the global reference frame with the help of GNSS and IMU measurements.
- Then, a recursive procedure allows to fuse the last single-ride map with the multi-ride map. In this way, the track signalling elements' location is refined after each ride.
- An anomaly detector is used to monitor the track signalling elements by analysing deviations from stored digital maps.

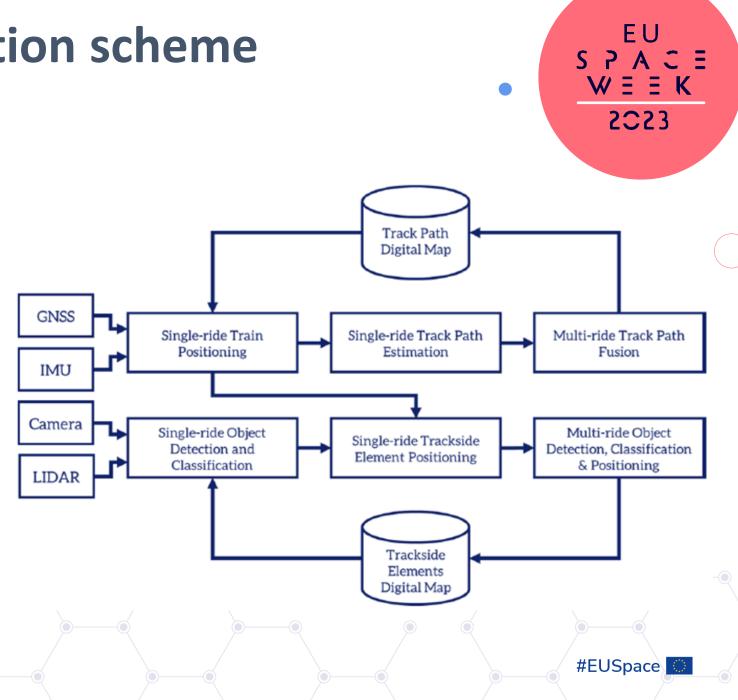

Conclusions

Looking ahead



- RFI plan is coherent with the Eu-Parliament Directive of July 7th 2021 art.34 "Points out the need to ensure synergies between the ERTMS and the European Global Navigation Satellite System (GNSS) as soon as possible, especially since GNSS signal availability relies on virtual balises, which would be less costly to deploy and to maintain, since it would speed up the ERTMS roll-out and since it would enhance the competitiveness of the ERTMS outside the EU".
- **ERSAT** has demonstrated the technical & economical viability of introducing GNSS and Satcom in the ERTMS system.
- **RAILGAP** is providing a contribution on remaining GAPS for the Digital Map.
- Pilot Line Novara Rho will validate and certify the GNSS positioning in the frame of ERTMS.

Next actions

- Adoption of **Satcom** in combination with other bearers as defined in the **FRMCS**
- Standardization of the air-interface to use EGNSS Augmentation networks
- Exploiting synergies for technological infrastructures (5G, GNSS...) common to ERTMS and Smart Roads





Thank you for your attention





www.euspaceweek.eu



#EUSW